

RR
SERIES

REPORT

new

RR Series Fast Acting Relay

New fast acting relay for control and signalling applications in the energy sector.

4 CO contacts or
3 NO + 1 CO contacts for direct 35 mm rail or socket mounting, respectively.



CE

Specification

- Nominal supply voltages 24 - 48 - 110...125 - 220 - 250 V DC
- 4 changeover contacts 8 A - direct 35 mm rail (EN 60715) mount version
3 NO + 1 changeover contacts 8 A - 11 pin socket type 90.21 mount version
- Reaction time <3 ms
- LED indication for relay status

new


RR Series

Fast Acting Relay 8 A




Type RR.14.9.xxx.0000

- Nominal supply voltages 24 - 48 - 110...125 - 220 - 250 V DC
- 4 changeover contacts 8 A
- Reaction time < 3ms
- LED indicator for relay status
- Modular, direct 35 mm rail (EN 60715) mount

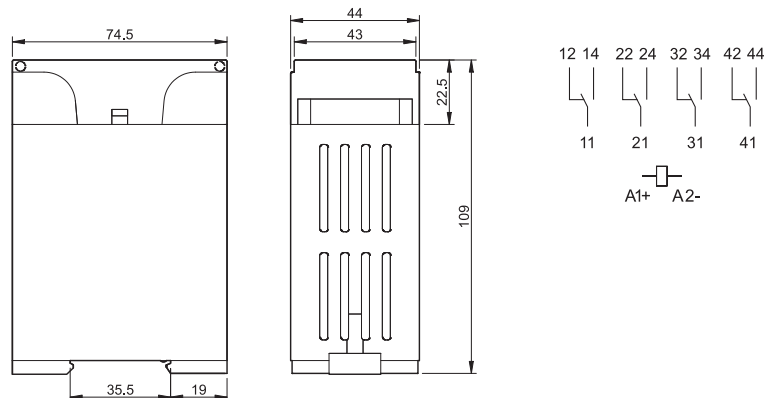

Type RR.24.9.xxx.9021

- Nominal supply voltages 24 - 110...125 - 220...250 V DC
- 3 NO + 1 CO contacts 8 A
- Reaction time < 3ms
- LED indicator for relay status
- Plug-in, for use with socket type 90.21

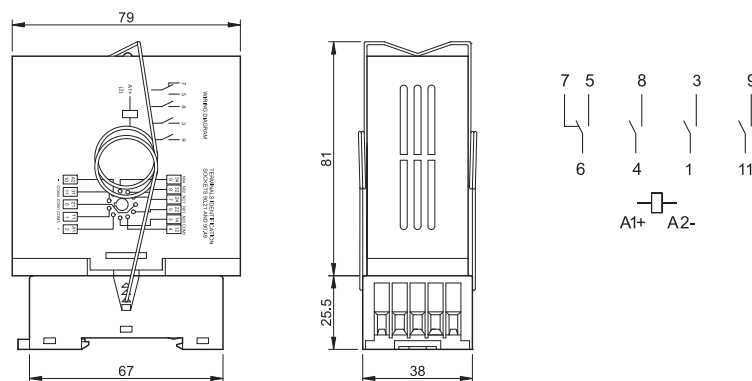

Accessories



Type 90.21
Screw terminal (Box clamp) socket
panel or 35 mm rail (EN 60715)
mount

